

Power Tendone

LT 1000 - LT 1500 - LT 2000

LOW VOLUME ARTICULATED ATOMIZER
STAINLESS RANGE FOR TRACTORS \geq CV 60 - 44 KW



Basic standard equipment with:


- Frame in treated tubular steel treated with high-grip base, metallic paint and transparent protection
- Steering capability 220°
- High density polyethylene tank lt. 1000, lt.1500 or lt. 2000 complete with product mixer, level indicator, handwashing tank, circuit washing and can washing
- Stainless steel and high density polyethylene distribution devices with vertical movement of 70°
- Fan housing made of hot galvanised sheet steel and painted
- Ultra-high performance centrifugal closed blade fan in sheet steel Ø 500 mm, air volume up to 17800 mc/h
- Mechanical step-up gear with oil-bath gears and 2 speed gearbox
- Disengagement and centrifugal clutch on the fan shaft
- Anodised aluminium 3 membrane pump, flow rate 130 lt/min, 20 bar
- 2 Solenoid valves with remote electrical control, pressure gauge and manual pressure regulator
- Litre-counter dispensers with graduated scale in stainless steel for each sector

BASIC STANDARD EQUIPMENT

TENDONE.1000	Tank lt. 1000 Rubber 10.0/80 – 12
TENDONE.1500	Tank lt. 1500 Rubber 10.0/75 – 15.3
TENDONE.2000	Tank lt. 2000 Rubber 10.0/75 – 15.3

ACCESSORIES ON REQUEST ORDERED AND INSTALLED AT THE ORIGIN

ACCESS.52	Universal joint cv 60-700 mm
ACCESS.EL	Electrostatic system for the positive charge of the treatment flow
OMOLOGAZIONE.POWER	Classification for road circulation, full load, with direct coupling to the tractor (special drawbar, lights, foot rest, license plate holder)

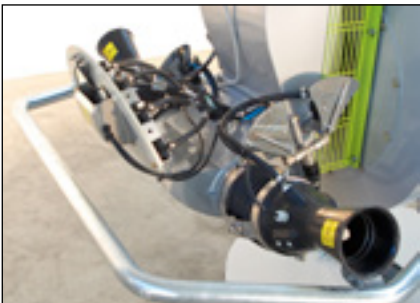

NEW LITRE-COUNTER DISPENSERS IN STAINLESS STEEL WITH GRADUATED SCALE FOR EACH SECTOR PROVIDED WITH THE EQUIPMENT



MODEL	minimum height	standard height	variable height	width	length	weight
Tendone	135 cm	135 cm	-	130 cm	155 cm	310 kg